



AURORA II

Glue down LVT

PRODUCT INFORMATION AND WARRANTY

Plank Dimensions: 1220 x 228.6 x 2mm

Packaged: 5.58sqm - 20 pieces / box

Edge: Micro Bevel

Coverage: Glue down installation - seamless floor application

Hot-Pressed LVT (Made from virgin materials)

Wear Layer: 0.3mm UV resistant wear layer

Warranty: 20 years heavy domestic / 5 years light commercial grade



Super UV Protect Wear Layer

With a double layer of UV protect wear layer that increases the scratch, wear and stain resistance of the product

Technical specifications	EN Norms	Result
Wear resistance	EN660-1/2	Group T
Slip resistance	EN12893	Class DS
Toxic element test	EN71-3	Pass, Not Toxic - Doesn't contain heavy metals or formaldehyde
Fire classification	EN ISO11925-2	
	EN13501-1	Bf1-S1
	EN ISO 9239-1	






LYANNA (ABOVE)

AURORA II GLUE DOWN VINYL



DIONE - WOOD EMOSS - 

 CCP - Beach Sand Oak

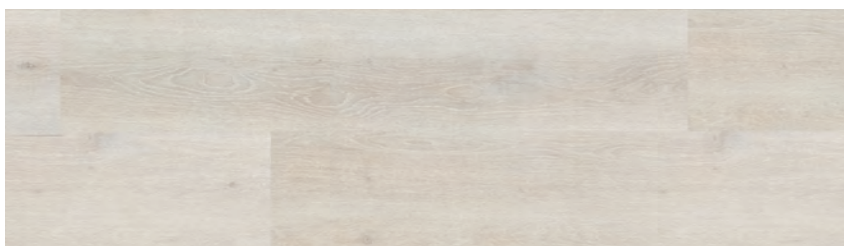


JULIET - WOOD EMOSS - 

 CCP - Sand Oak / Sandstone



CELESTE - WOOD EMOSS - 

 CCP - Mist Oak / Beach Sand Oak

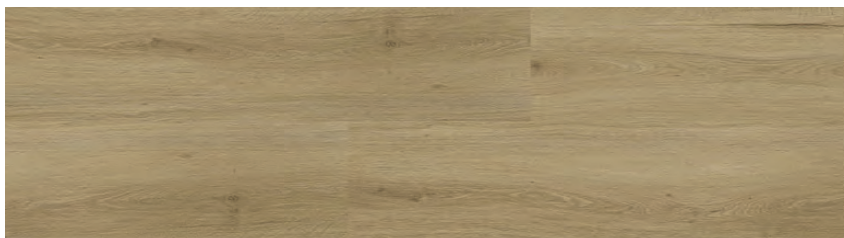

SERENA - WOOD EMOSS - 

 CCP - Chestnut



SELENE - WOOD EMOSS - 

 CCP - Wheat



LYANNA - WOOD EMOSS - 

 CCP - Washed Oak

INTERNATIONAL CERTIFICATION



EN ISO 10582 - Fit for use classification



Heavy Domestic
(Class 23)

Light Commercial
(Class 31)



AURORA II

herringbone Glue down LVT

PRODUCT INFORMATION AND WARRANTY

Plank Dimensions: 590 x 118 x 2.0mm

Packaged: 2.646 sqm - 38 pieces / box

Edge: Micro Bevel

Coverage: Glue down installation - seamless floor application

Hot-Pressed LVT (Made from virgin materials)

Wear Layer: 0.3mm UV resistant wear layer

Warranty: 20 years heavy domestic / 5 years light commercial grade



Super UV Protect Wear Layer

With a double layer of UV protect wear layer that increases the scratch, wear and stain resistance of the product

Technical specifications	EN Norms	Result
Wear resistance	EN660-1/2	Group T
Slip resistance	EN12893	Class DS
Toxic element test	EN71-3	Pass, Not Toxic - Doesn't contain heavy metals or formaldehyde
Fire classification	EN ISO11925-2	
	EN13501-1	Bf1-S1
	EN ISO 9239-1	





CELESTE (ABOVE)

AURORA II HERRINGBONE GLUE DOWN VINYL



CELESTE - WOOD EMOSS - 

 CCP - Mist Oak / Beach Sand Oak



ALINA - WOOD EMOSS - 

 CCP - Washed Oak / Beach Sand Oak



SELENE - WOOD EMOSS - 

 CCP - Wheat

INTERNATIONAL CERTIFICATION



EN ISO 10582 - Fit for use classification



Heavy Domestic
(Class 23)

Light Commercial
(Class 31)



GALAXY II

Glue down LVT



Super UV Protect Wear Layer

With a double layer of UV protect wear layer that increases the scratch, wear and stain resistance of the product

PRODUCT INFORMATION AND WARRANTY

Plank Dimensions: 1526 x 230 x 2.5mm

Packaged: 4.914sqm - 14 pieces / box

Edge: Painted Bevel

Coverage: Glue down installation - seamless floor application

Hot-Pressed LVT (Made from virgin materials)

Wear Layer: 0.5mm Super UV wear layer

Warranty: Lifetime domestic / 10 years general commercial grade


Technical specifications	EN Norms	Result
Wear resistance	EN660-1/2	Group T
Slip resistance	EN12893	Class DS
Toxic element test	EN71-3	Pass, Not Toxic - Doesn't contain heavy metals or formaldehyde
Fire classification	EN ISO11925-2 EN13501-1 EN ISO 9239-1	Bf1-S1





ORION (ABOVE)

GALAXY II GLUE DOWN VINYL

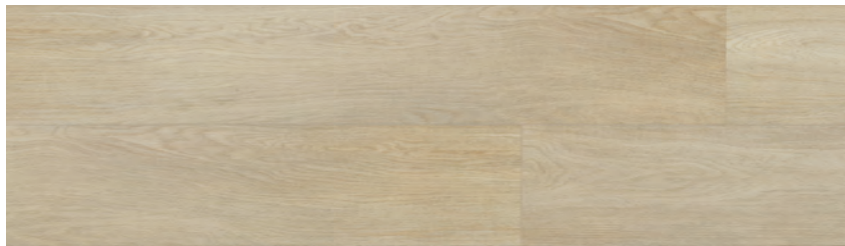


SAURON - WOOD EMBOSS - 

 CCP - Mist Oak




BODE - EIR - 

 CCP - Mist Oak / Washed Oak

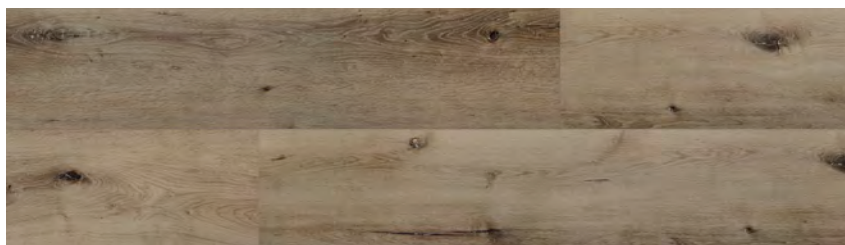


MALIN - WOOD EMBOSS - 

 CCP - Wheat / Mist Oak

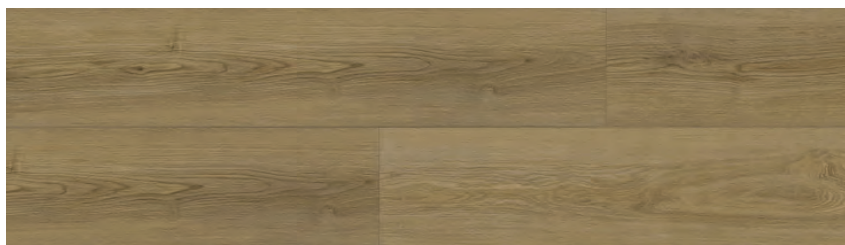


ORION - WOOD EMBOSS - 

 CCP - Mist Oak

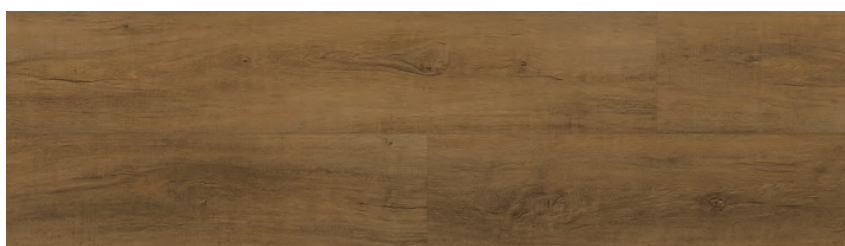

ALTAIR - EIR - 

 CCP - Meva Oak

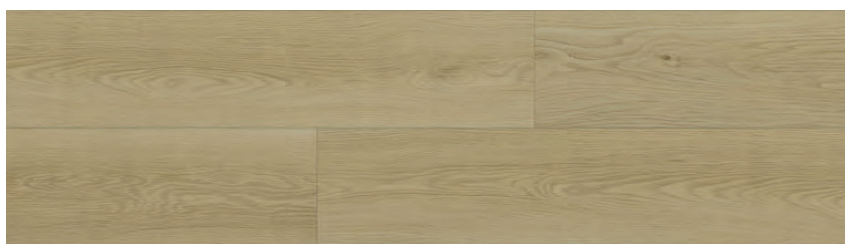

ZEPHYRA - WOOD EMBOSS - 

 CCP - Washed Oak

INTERNATIONAL CERTIFICATION



EN ISO 10582 - Fit for use classification



Heavy Commercial
(Class 33)



FINCRETE



CEMENTITIOUS GLUE DOWN

With a SUPER UV protect wear layer that increases the scratch, wear and stain resistance of the product

PRODUCT INFORMATION AND WARRANTY

Plank Dimensions: 908.4 x 451.2 x 2.5mm

Packaged: 3.279 sqm - 8 pieces / box

Edge: Micro Bevel

Coverage: Glue down installation - seamless floor application

Hot-Pressed LVT (Made from virgin materials)

Wear Layer: 0.55mm Super UV wear layer

Warranty: 30 years heavy domestic / 10 years heavy commercial grade


Technical specifications	EN Norms	Result
Scratch appearance assessment	EN14565:2004(E)	≥ 20N Discontinuous scratch marks
Slip resistance	EN12893	Class DS
Toxic element test	EN71-3	Pass, Not Toxic - Doesn't contain heavy metals or formaldehyde
Fire classification	EN ISO11925-2 EN13501-1 EN ISO 9239-1	Bf1-S1





FLINT (ABOVE)

FINCRETE GLUE DOWN VINYL

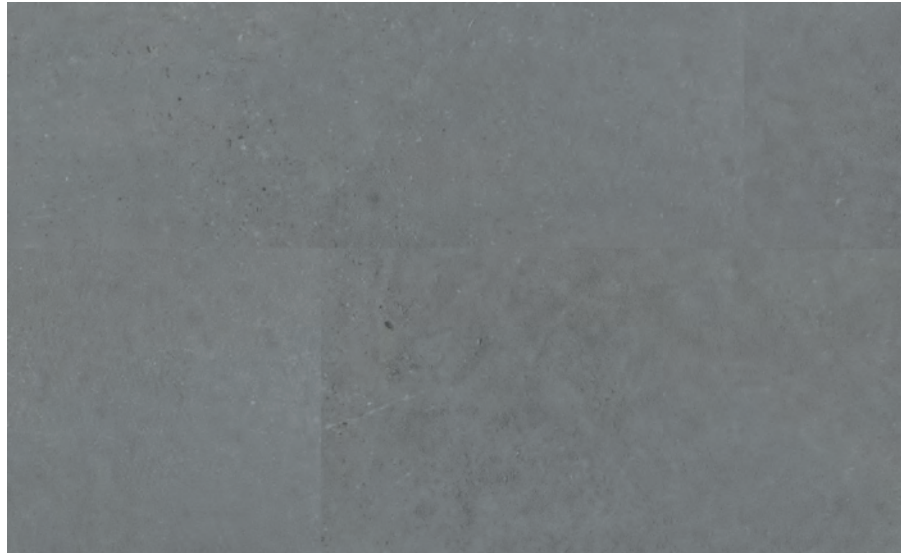

ASH - CORAL FINISH - 

 CCP - Silver



SMOKE - CORAL FINISH - 

 CCP - Silver

INTERNATIONAL CERTIFICATION



EN ISO 10582 - Fit for use classification



Heavy Commercial
(Class 33)



FLINT - CORAL FINISH - 

 CCP - Silver



Sapphire SPC WIDE Board

GARNET (ABOVE)

PRODUCT INFORMATION AND WARRANTY

Plank Dimensions: 1230 x 228 x 5.5mm

Packaged: 2.24sqm - 8 pieces / box

Coverage: 10 x 15 lin.m in length / width

Expansion gap: 10mm

Core: Rigid SPC core, with 1mm IXPE underlay attached to the back

Wear Layer: 0.3mm Super UV wear layer

Warranty: 20 years heavy domestic / 5 years moderate commercial grade



Super UV Protect Wear Layer

With a double layer of UV protect wear layer that increases the scratch, wear and stain resistance of the product

Technical specifications	EN Norms	Result
Wear resistance	EN 660-2:1999/ EN 549-2011	Group T
Slip resistance	EN 1404+AC	Class DS
Formaldehyde emissions	EN 1404:2004 + AC:2006	Class E1
Fire classification	EN 13501-1 EN1404 + AC	Bf1-S1



SAPPHIRE SPC WIDE



JASPER - EIR - BEV

CCP - Mist Oak/ Washed Oak



MORGANITE - ANTIQUE WOOD TEXTURE - BEV

CCP - Mist Oak



GARNET - ANTIQUE WOOD TEXTURE - BEV

CCP - Mist Oak




PYRITE - EIR - BEV

CCP - Meva Oak



CITRINE - ANTIQUE WOOD TEXTURE - BEV

CCP - Mist Oak

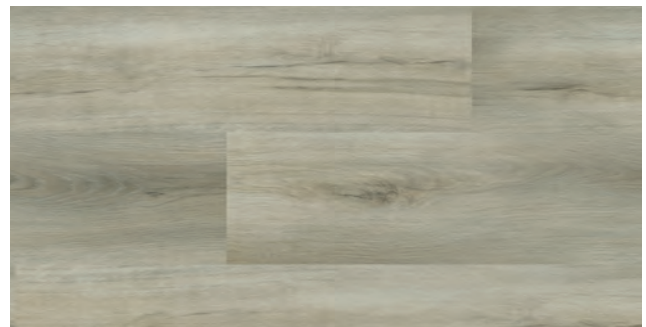

JONQUIL - ANTIQUE WOOD TEXTURE - BEV

CCP - Beach Sand Oak / Wheat



PACIFIC OPAL - ANTIQUE WOOD TEXTURE - BEV

CCP - Silver



TIGERS EYE - ANTIQUE WOOD TEXTURE - BEV

CCP - Sand Oak / Bronze

INTERNATIONAL CERTIFICATION





DIAMOND CORE SPC+

ONYX (ABOVE)

PRODUCT INFORMATION AND WARRANTY

Plank Dimensions: 1500 x 228 x 6.5mm

Packaged: 2.052sqm - 6 pieces / box

Coverage: 15 x 15 lin.m in length / width

Expansion gap: 10mm

Core: Rigid SPC core, with 1.5mm IXPE underlay attached to the back

Wear Layer: 0.5mm Super UV wear layer

Warranty: 30 years heavy domestic / 10 years general commercial grade



Super UV Protect Wear Layer

With a double layer of UV protect wear layer that increases the scratch, wear and stain resistance of the product

Technical specifications	EN Norms	Result
Wear resistance	EN 660-2	Group T
Slip resistance	EN 1404	Class DS
Formaldehyde emissions	EN 14041	Class E1
Fire classification	EN 13501-1 EN1404	Bf1-S1



DIAMOND CORE SPC+



ALABASTER - ANTIQUE WOOD - 

 CCP - Sand Oak / Silver



CUPRITE - RANDOM EIR - 

 CCP - Beach Sand Oak / Silver



ZIRCON - RANDOM EIR - 

 CCP - Mist Oak / Wheat



TEKTITE- EIR - 

 CCP - Mocca



AGATE - ANTIQUE WOOD - 

 CCP - Mocca



ONYX - RANDOM EIR - 

 CCP - Chestnut / Meva Oak

INTERNATIONAL CERTIFICATION

