



Bella Neo

FREYZA (ABOVE)

VIVA finish

Sq.E

BELLA with Viva finish that replicates the feel and texture of real wood and a square edge that creates a seamless flooring pattern with no visible plank lines

PRODUCT INFORMATION AND WARRANTY

Plank Dimensions: 1200 x 191 x 8mm

Packaged: 2.292sqm - 10 pieces / box

Coverage: 9 x 9 lin.m in length / width

Expansion gap: 10/12mm

Core: 8mm HDF. Core with an average board density > 860-880 kg/m³

Fit for use grading: AC3/W31 – Moderate commercial / Heavy domestic

Warranty: 15 years heavy domestic / 5 years moderate commercial use

Technical specifications	Standard	Characteristic/Result
Wear resistance	EN 13329	AC3/W31
Stain resistance	EN 13329	Rating 5 - no visible change
Swelling test	EN 13329	Average swelling ≤ 18%
Light fastness	EN 13329	Grade 6 - No discolouration
Impact resistance	EN 13329	IC2





VEGAS - VIVA FINISH - 

 CCP - White/Silver



ANEMON - VIVA FINISH - 

 CCP - Sand Oak



FREZYA - VIVA FINISH - 

 CCP - Mist Oak / Wheat



YUKA - VIVA FINISH - 

 CCP - Meva Oak / Mist Oak



GARDENIA - VIVA FINISH - 

 CCP - Mist Oak



DEFNE - VIVA FINISH - 

 CCP - Mocca / African Oak



TREND (ABOVE)

PRODUCT INFORMATION AND WARRANTY

Plank Dimensions: 1200 x 191 x 8mm

Packaged: 1.83sqm - 8 pieces / box

Coverage: 10 x 12 lin.m in length / width

Expansion gap: 10/12mm

Core: 8mm HDF. Core with an average board density > 850-900 kg/m³

Fit for use grading: AC4/W32 – General commercial / Heavy domestic

Warranty: 20 years heavy domestic / 5 years general commercial use


Technical specifications	Standard	Characteristic/Result
Wear resistance	EN 13329	AC4/W32
Stain resistance	EN 13329	Rating 5 - no visible change
Swelling test	EN 13329	Average swelling ≤ 18%
Light fastness	EN 13329	Grade 6 - No discolouration
Impact resistance	EN 13329	IC2





MERIC - WOOD EMBOSSED - 

 CCP - Sand Stone

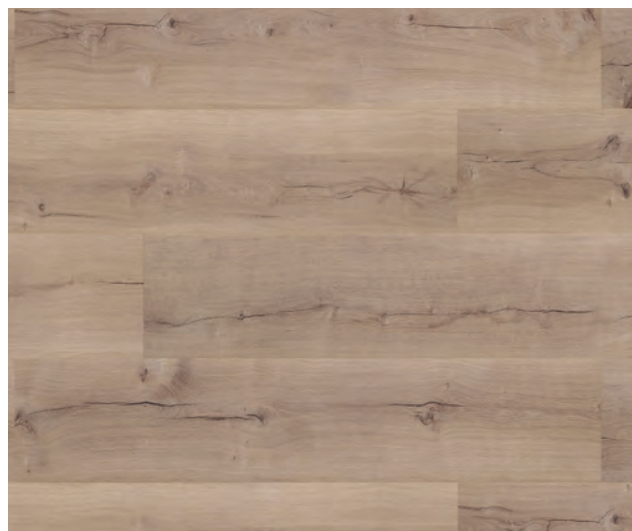


ILGAZ - WOOD EMBOSSED - 

 CCP - Mist Oak / Meva Oak



GALA OAK - WOOD EMBOSSED - 

 CCP - Washed Oak

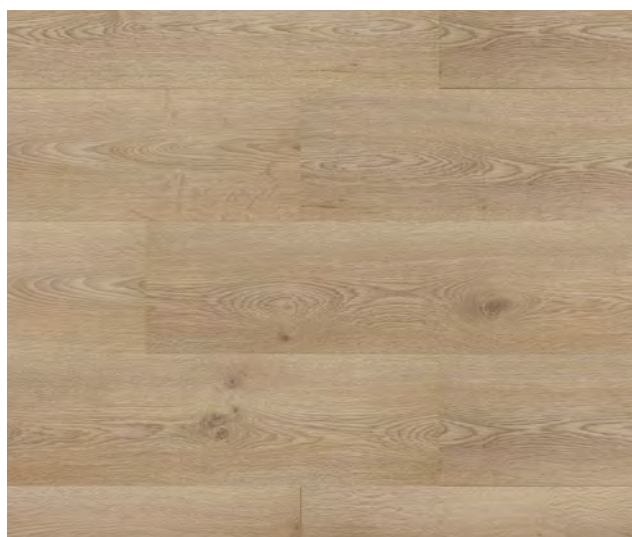

TREND OAK - WOOD EMBOSSED - 

 CCP - Mist Oak



RHODES - WOOD EMBOSSED - 

 CCP - African Oak



LENA - WOOD EMBOSSED - 

 CCP - Sand Oak/ Sand Stone



ARMONIA

LARGE

SORENTO (ABOVE)

PRODUCT INFORMATION AND WARRANTY

Plank Dimensions: 1380 x 246 x 8mm

Packaged: 2.376 sqm - 7 pieces / box

Coverage: 10 x12 lin.m in any direction

Expansion gap: 10/12mm

Core: 8mm HDF Core with an average board density > 850-900 kg/m³

Fit for use grading: AC4/W32 – General commercial / Heavy domestic

Warranty: 20 years heavy domestic / 5 years general commercial use

Technical specifications	Standard	Characteristic/Result
Wear resistance	EN 13329	AC4/W32
Stain resistance	EN 13329	Rating 5 - no visible change
Swelling test	EN 13329	Average swelling ≤ 18%
Light fastness	EN 13329	Grade 6 - No discolouration
Impact resistance	EN 13329	IC1





TORINO - MOORLAND FINISH - 

 CCP - Mist Oak / Wheat



RAVELLO - MOORLAND FINISH - 

 CCP - Silver/Wheat




BARI - MOORLAND FINISH - 

 CCP - African Oak / Bronze



TOSCANA - MOORLAND FINISH - 

 CCP - Chestnut

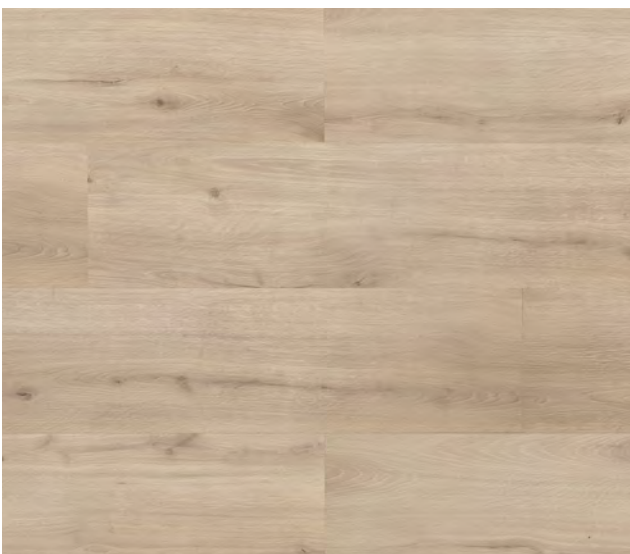

SORENTO - MOORLAND FINISH - 

 CCP - Mist Oak / Sandstone



PADOVA - MOORLAND FINISH - 

 CCP - Mocca



PARADOR

OAK EVERGLADE NATURAL (ABOVE)

PRODUCT INFORMATION AND WARRANTY

Plank Dimensions: 2200 x 243 x 9 mm
Packaged: 2.673 sqm - 5 pieces / box

Coverage / Expansion: Up to 12 x 8m
Expansion gap: 10 – 15mm
Core: Aqua-Proof core board with edge impregnation for swell protection
Fit for Use: Class 23 / Class 33 – Heavy Domestic / Commercial Use
Warranty: Lifetime Residential / 10-Year Commercial
Surface: Natural Matt finish

SafeLock® PRO click connection



SafeLock® PRO is a high-precision click system that locks planks together securely without glue, ensuring faster installation, tighter joints, long-term stability, and improved water resistance at the joints.

Technical specifications	Standard	Characteristic/Result
Wear resistance	EN EN 438-2	AC5/W33 - V4
Stain resistance	ISO 24336	Category 1+2: Level 5 Category 3: Level 4/5
Swelling test	EN 13329	ISO 24336 – Average swelling ≤ 12%
Light fastness	EN ISO 4892-2	Grey Scale ≥ 4 (No significant discolouration)
Impact resistance	EN 17368/ EN 13329	(Small Ball): ≥ 70 mm / (Large Ball): ≥ 1000 mm





OAK SKYLINE PEARL-GREY - CHATEAU PLANK -   CCP - Sandstone




OAK CASTELL LIMED - CHATEAU PLANK -   CCP - Mist Oak




OAK LOFT PURE - CHATEAU PLANK -   CCP - Mist Oak / Washed Oak



OAK AVANT SANDED - CHATEAU PLANK -   CCP - Mist Oak

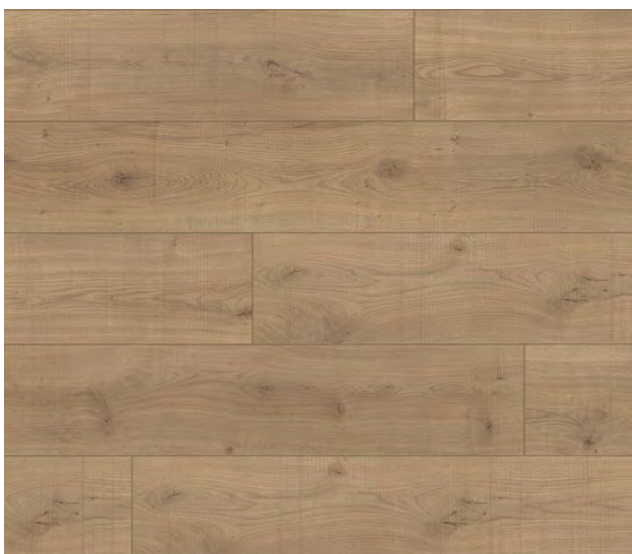

LUMBERJACK - CHATEAU PLANK -   CCP - Meva Oak

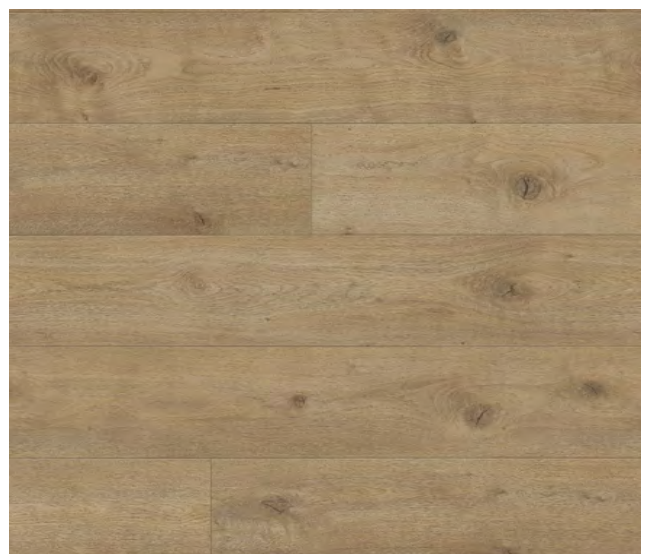

EVERGLADE - CHATEAU PLANK -   CCP - Chestnut/ Meva Oak



black forest+

OAKWOOD VILLA (ABOVE)

PRODUCT INFORMATION AND WARRANTY

Plank Dimensions: 2200 x 236 x 12mm
Packaged: 2.596sqm - 5 pieces / box

Coverage: 20 x 20 lin.m in length / width
Wxpanansion gap: 12/15mm
Core: Water-resistant Compact Core + with average board density > 950 kg/m³
Fit for use grading: AC5/W33 – Heavy commercial / Heavy domestic
Warranty: 30 years heavy domestic / 10 years heavy commercial use

Black Compact Core +



Black HDF Compact Core + is 72 hours topically water resistant with a low 5% swell rate after full board immersion making these planks more resistant to moisture damage.

Technical specifications	Standard	Characteristic/Result
Wear resistance	EN 13329	AC5/W33 - V4
Stain resistance	EN 13329	Rating 5 - no visible change
Swelling test	EN 13329	Average swelling ≤ 5%
Light fastness	EN 13329	Grade 6 - No discolouration
Impact resistance	EN 13329	IC2



BLACK FOREST +



WYCH ELM - RANDOM EIR - 

 CCP - Meva Oak / Chestnut



WILD THORN - RANDOM EIR - 

 CCP - Meva Oak / Washed Oak




MAPLE MIST - EIR - 

 CCP - Mist Oak / Sandstone



IRISH PINE - RANDOM EIR - 

 CCP - Sandstone / Mist Oak

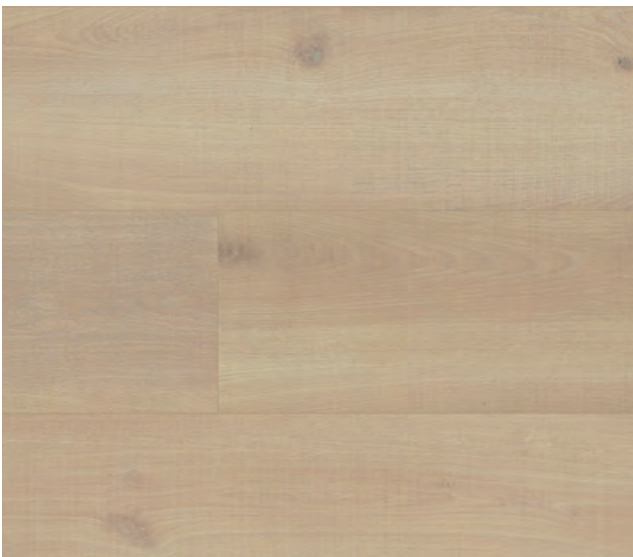

SUN KISSED OAK - RANDOM EIR - 

 CCP - Washed Oak / Meva Oak



OAKWOOD VILLA - EIR - 

 CCP - Chestnut / Bronze



AUTHENTIC

herringbone
click laminate flooring

SUN BLEACHED OAK (ABOVE)

PRODUCT INFORMATION AND WARRANTY

Plank Dimensions: 600 x 100 x 12mm

Packaged: 1.32sqm - 22 pieces / box, each box includes both A and B planks (not sold separately) and is suitable for floating or glue-down installation

Coverage: 12 x 12 lin.m in length / width

Expansion gap: 10/12mm

Core: 12mm HDF Core with an average board density > 880/890 kg/m³

Fit for use grading: AC4/W32 – General commercial / Heavy domestic

Warranty: 25 years heavy domestic / 5 years general commercial use

Technical specifications	Standard	Characteristic/Result
Wear resistance	EN 13329	AC4/W32 - V4
Stain resistance	EN 13329	Rating 5 - no visible change
Swelling test	EN 13329	Average swelling < 10%
Light fastness	EN 13329	Grade 6 - No discolouration
Impact resistance	EN 13329	IC2



AUTHENTIC HERRINGBONE



SUN BLEACHED OAK - MATT WOOD GRAIN - **V4**






CCP - Meva Oak / Washed Oak



SUN BLEACHED OAK (ABOVE)

AUTHENTIC HERRINGBONE LAYING PATTERNS

Herringbone laying patterns



Basket weave laying patterns

